


SKD 146/16-L140

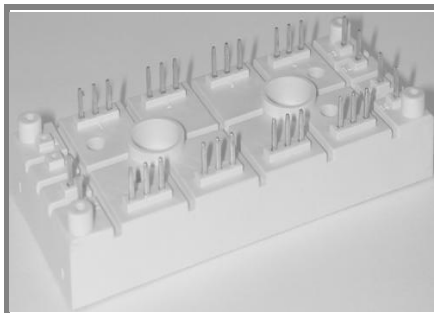

SEMIPONT™ 6

3-Phase Bridge Rectifier + IGBT braking chopper

SKD 146/16-L140

Target Data

Features

- Compact design
- Two screws mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- High surge currents
- 1600V reverse voltage
- UL recognized, file no. E 63 532
- Integrated PTC temperature sensor
- Remarks: $V_{CE,sat}$, V_F = chip level value

Typical Applications







- DC drives
- Controlled filed rectifiers for DC motors
- Controlled battery charger





V_{RSM} V	V_{RRM} , V_{DRM} V	$I_D = 140$ A (maximum value for continuous operation) ($T_s = 85$ °C)
1700	1600	SKD146/16-L140

Absolute Maximum Ratings		$T_s = 25$ °C, unless otherwise specified	
Symbol	Conditions	Values	Units
Bridge - Rectifier			
I_D	$T_s = 85$ °C; inductive load	140	A
I_{FSM}/I_{TSM}	$t_p = 10$ ms; $\sin 180^\circ$; T_{jmax}	1250	A
i^2t	$t_p = 10$ ms; $\sin 180^\circ$; T_{jmax}	7800	A ² s
IGBT - Chopper			
V_{CES}/V_{GES}	$T_s = 25$ (70) °C	1200 / 20	V
I_C	$T_s = 25$ (70) °C	165 (110)	A
I_{CM}	$t_p = 1$ ms; $T_s = 25$ (70) °C	330 (220)	A
Freewheeling - CAL Diode			
V_{RRM}	$T_s = 25$ (70) °C	1200	V
I_F	$T_s = 25$ (70) °C	130 (90)	A
I_{FM}	$t_p = 1$ ms; $T_s = 25$ (70) °C	240 (180)	A
T_{vj}	Diode & IGBT (Thyristor)	- 40 ... + 150 (0 ... + 125)	°C
T_{stg}		- 40 ... + 125	°C
T_{solder}	terminals, 10 s	260	°C
V_{isol}	a.c. (50) Hz, RMS 1 min. / 1 s	3000 / 3600	V

Characteristics		$T_s = 25$ °C, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
Diode - Rectifier					
V_{TO} / r_t	$T_j = 125$ °C		0,8 / 4		V / mΩ
$R_{th(j-s)}$	per diode			0,8	K/W
IGBT - Chopper					
$V_{CE(sat)}$	$I_C = 140$ A, $T_j = 25$ °C; $V_{GE} = 15$ V		1,65	2,05	V
$R_{th(j-s)}$	per IGBT			0,35	K/W
$t_{d(on)} / t_r$	valid for all values:		118 / 104		ns
$t_{d(off)} / t_f$	$V_{CC} = 600$ V; $V_{GE} = 15$ V; $I_C = 140$ A; $T_j = 125$ °C;		1008 / 95		ns
$E_{on} + E_{off}$	$T_j = 125$ °C; $R_G = 22$ Ω; inductive load		64		mJ
CAL - Diode - Freewheeling					
$V_{T(TO)} / r_t$	$T_j = 125$ °C		0,8 / 5	0,9 / 5,7	V / mΩ
$R_{th(j-s)}$	per diode			0,6	K/W
I_{RRM}	valid for all values:		40		A
Q_{rr}	$I_F = 140$ A; $V_R = - 600$ V; $di_F/dt = - 1000$ A/μs		20		μC
E_{off}	$V_{GE} = 0$ V; $T_j = 125$ °C		8,8		mJ
Temperature Sensor					
R_{TS}	$T = 25$ (100) °C;		1000 (1670)		Ω
Mechanical data					
M_S	mounting Torque	2,55		3,45	Nm

D

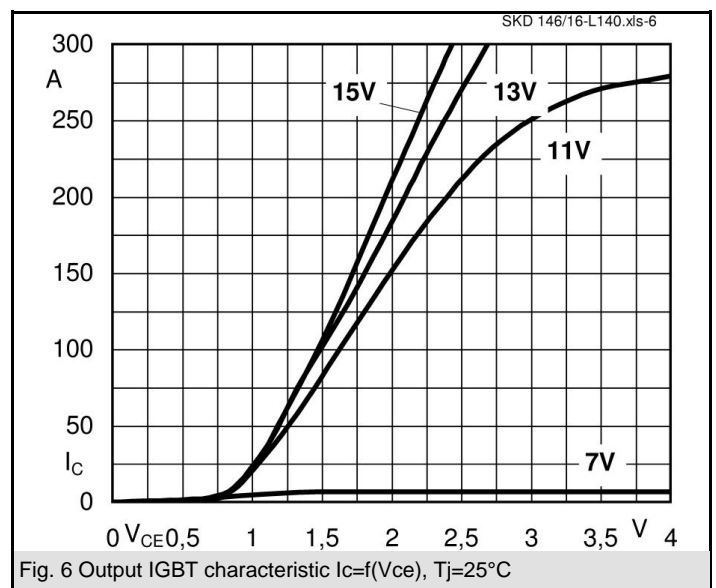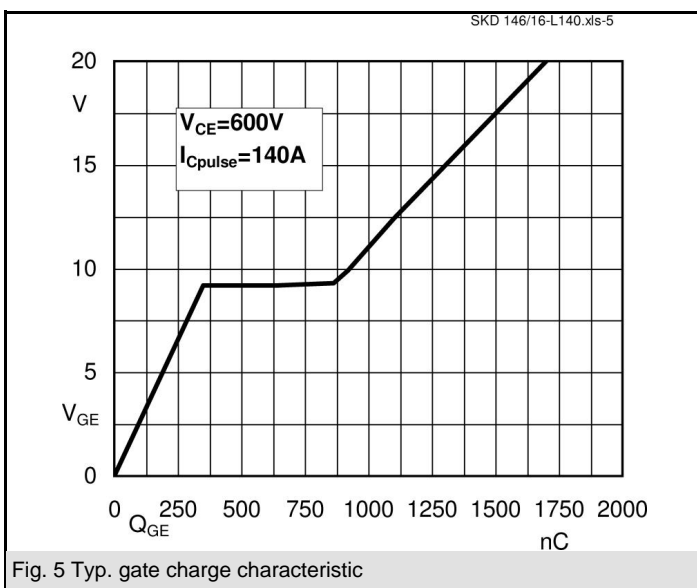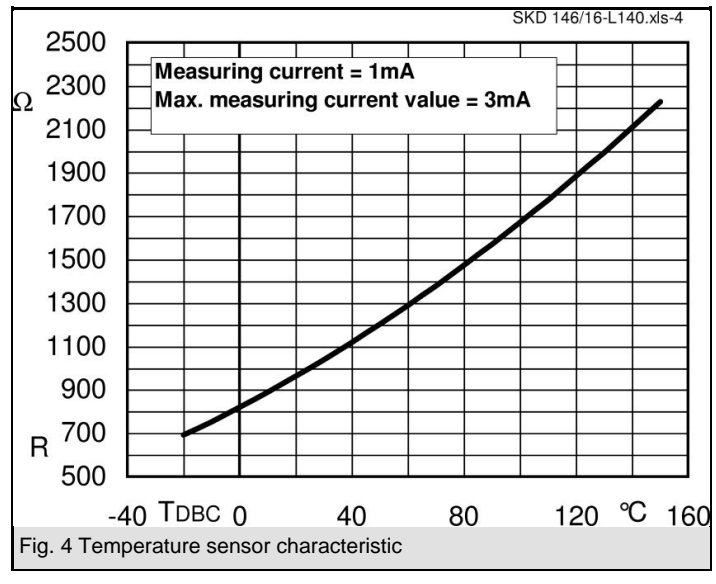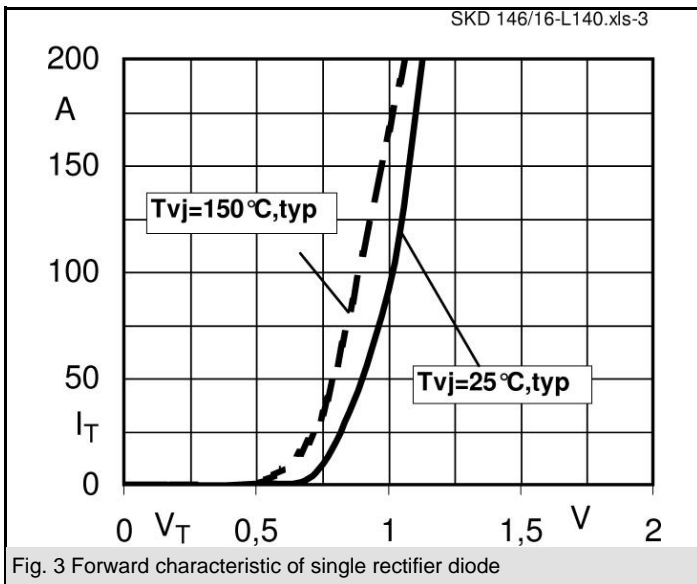
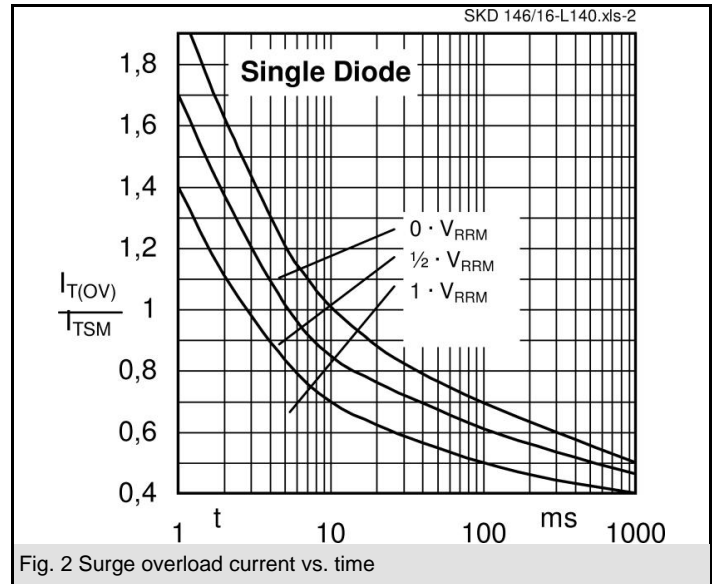
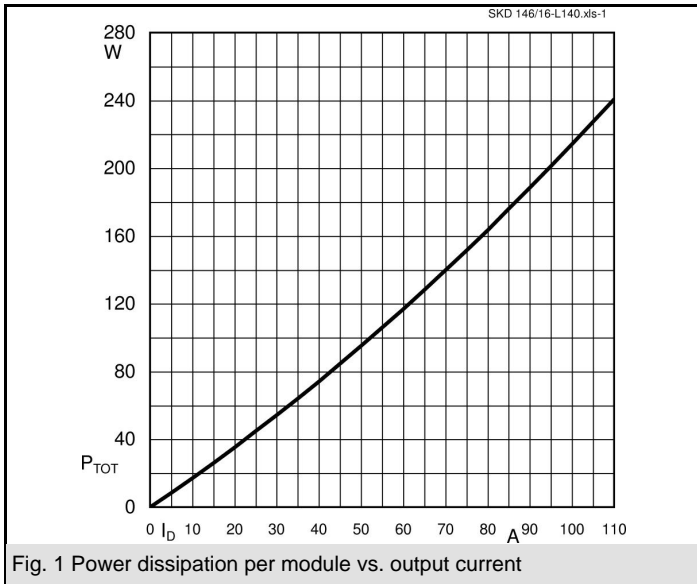


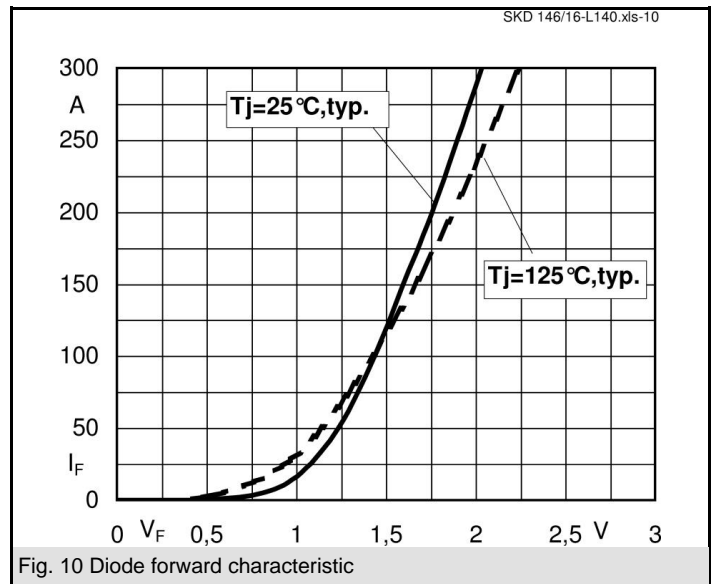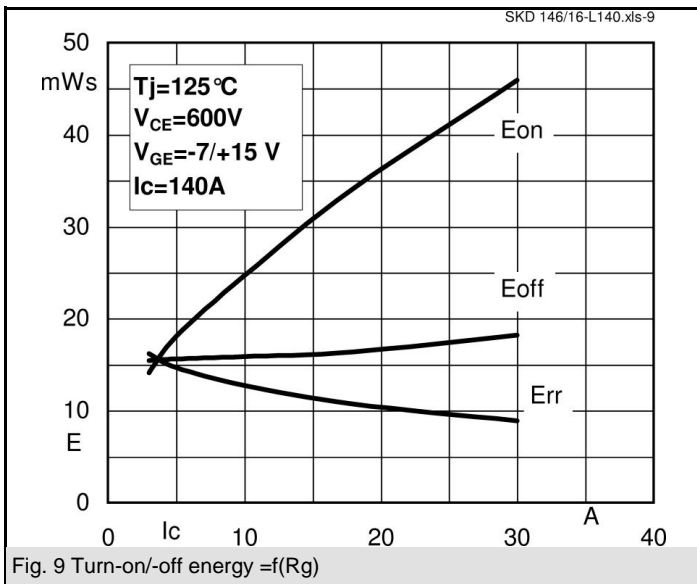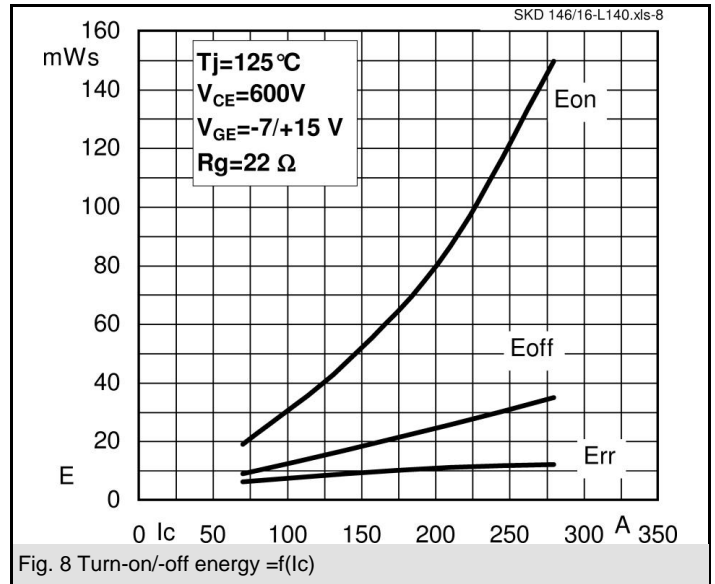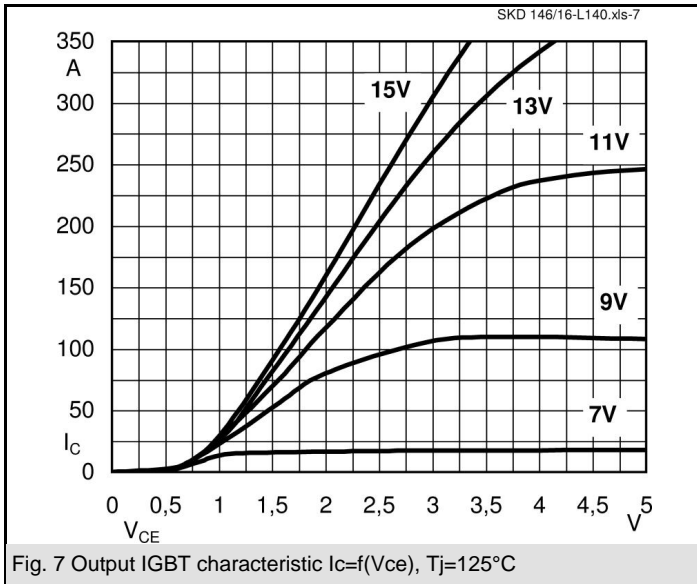


SKD 146/16-L140

UL recognized
File n° E 63 532

Dimensions in mm

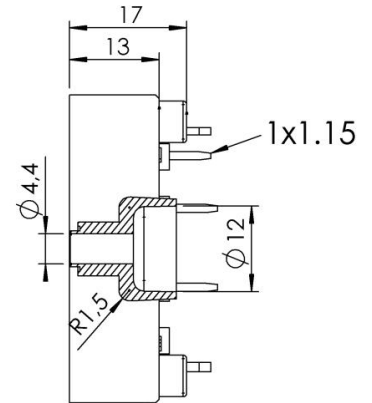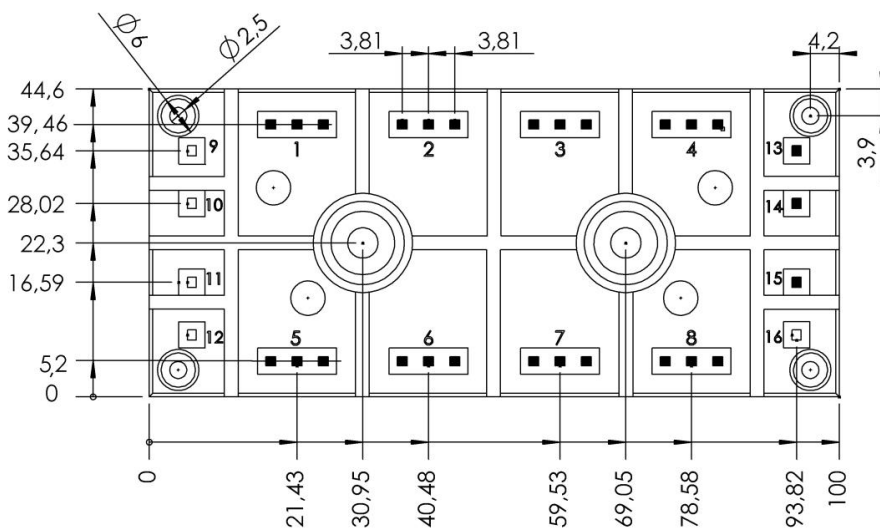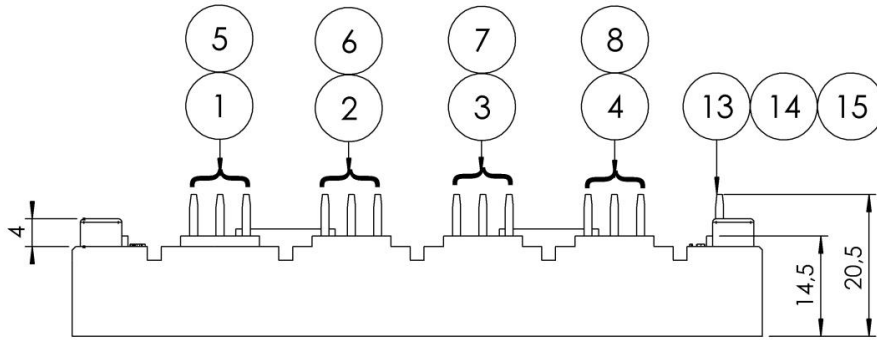

Case G 60

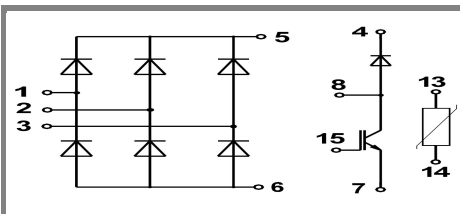

Case G 60

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn