

SEMiX603GB066HDs



SEMiX® 3s

Trench IGBT Modules

SEMiX603GB066HDs

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- UL recognised file no. E63532

Typical Applications*

- Matrix Converter
- Resonant Inverter
- Current Source Inverter

Remarks

- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Product reliability results are valid for $T_j=150^\circ\text{C}$
- For short circuit: Soft R_{Goff} recommended
- Take care of over-voltage caused by stray inductance

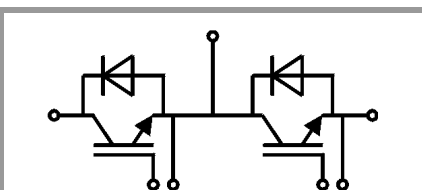

GB

| Absolute Maximum Ratings | | | | |
|--------------------------|---|---------------------------|------------------|---------------|
| Symbol | Conditions | Values | Unit | |
| IGBT | | | | |
| V_{CES} | $T_j = 25^\circ\text{C}$ | 600 | V | |
| I_C | $T_j = 175^\circ\text{C}$ | $T_c = 25^\circ\text{C}$ | 720 | A |
| | | $T_c = 80^\circ\text{C}$ | 541 | A |
| I_{Cnom} | | 600 | A | |
| I_{CRM} | $I_{CRM} = 2 \times I_{Cnom}$ | 1200 | A | |
| V_{GES} | | -20 ... 20 | V | |
| t_{psc} | $V_{CC} = 360\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 600\text{ V}$ | $T_j = 150^\circ\text{C}$ | 6 | μs |
| T_j | | -40 ... 175 | $^\circ\text{C}$ | |
| Inverse diode | | | | |
| I_F | $T_j = 175^\circ\text{C}$ | $T_c = 25^\circ\text{C}$ | 771 | A |
| | | $T_c = 80^\circ\text{C}$ | 562 | A |
| I_{Fnom} | | 600 | A | |
| I_{FRM} | $I_{FRM} = 2 \times I_{Fnom}$ | 1200 | A | |
| I_{FSM} | $t_p = 10\text{ ms, sin } 180^\circ, T_j = 25^\circ\text{C}$ | 1800 | A | |
| T_j | | -40 ... 175 | $^\circ\text{C}$ | |
| Module | | | | |
| $I_{t(RMS)}$ | $T_{terminal} = 80^\circ\text{C}$ | 600 | A | |
| T_{stg} | | -40 ... 125 | $^\circ\text{C}$ | |
| V_{isol} | AC sinus 50Hz, $t = 1\text{ min}$ | 4000 | V | |

| Characteristics | | | | | |
|-----------------|--|---------------------------|------|-------|------------------|
| Symbol | Conditions | min. | typ. | max. | Unit |
| IGBT | | | | | |
| $V_{CE(sat)}$ | $I_C = 600\text{ A}$ $V_{GE} = 15\text{ V}$ chipelevel | $T_j = 25^\circ\text{C}$ | 1.45 | 1.85 | V |
| | | $T_j = 150^\circ\text{C}$ | 1.7 | 2.1 | V |
| V_{CE0} | | $T_j = 25^\circ\text{C}$ | 0.9 | 1 | V |
| | | $T_j = 150^\circ\text{C}$ | 0.85 | 0.9 | V |
| r_{CE} | $V_{GE} = 15\text{ V}$ | $T_j = 25^\circ\text{C}$ | 0.9 | 1.4 | $\text{m}\Omega$ |
| | | $T_j = 150^\circ\text{C}$ | 1.4 | 2.0 | $\text{m}\Omega$ |
| $V_{GE(th)}$ | $V_{GE}=V_{CE}, I_C = 9.6\text{ mA}$ | 5 | 5.8 | 6.5 | V |
| I_{CES} | $V_{GE} = 0\text{ V}$ $V_{CE} = 600\text{ V}$ | $T_j = 25^\circ\text{C}$ | 0.15 | 0.45 | mA |
| | | $T_j = 150^\circ\text{C}$ | | | mA |
| C_{ies} | $V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$ | $f = 1\text{ MHz}$ | 37.0 | | nF |
| C_{oes} | | $f = 1\text{ MHz}$ | 2.31 | | nF |
| C_{res} | | $f = 1\text{ MHz}$ | 1.10 | | nF |
| Q_G | $V_{GE} = -8\text{ V...} + 15\text{ V}$ | | 4800 | | nC |
| R_{Gint} | $T_j = 25^\circ\text{C}$ | | 0.67 | | Ω |
| $t_{d(on)}$ | $V_{CC} = 300\text{ V}$ $I_C = 600\text{ A}$ | $T_j = 150^\circ\text{C}$ | 150 | | ns |
| t_r | $V_{GE} = \pm 15\text{ V}$ | $T_j = 150^\circ\text{C}$ | 145 | | ns |
| E_{on} | $R_{Gon} = 3\ \Omega$ | $T_j = 150^\circ\text{C}$ | 12 | | mJ |
| $t_{d(off)}$ | $R_{Goff} = 3\ \Omega$ | $T_j = 150^\circ\text{C}$ | 1050 | | ns |
| t_f | | $T_j = 150^\circ\text{C}$ | 105 | | ns |
| E_{off} | | $T_j = 150^\circ\text{C}$ | 43 | | mJ |
| $R_{th(j-c)}$ | per IGBT | | | 0.087 | K/W |

SEMiX603GB066HDs



SEMiX® 3s

Trench IGBT Modules

SEMiX603GB066HDs

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- UL recognised file no. E63532


Typical Applications*

- Matrix Converter
- Resonant Inverter
- Current Source Inverter

Remarks

- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Product reliability results are valid for $T_j=150^\circ\text{C}$
- For short circuit: Soft R_{Goff} recommended
- Take care of over-voltage caused by stray inductance

| Characteristics | | | | | | |
|--------------------------|---|---------------------------|------|----------------|------|---------------|
| Symbol | Conditions | | min. | typ. | max. | Unit |
| Inverse diode | | | | | | |
| $V_F = V_{EC}$ | $I_F = 600\text{ A}$ $V_{GE} = 0\text{ V}$ chip | $T_j = 25^\circ\text{C}$ | | 1.4 | 1.60 | V |
| | | $T_j = 150^\circ\text{C}$ | | 1.4 | 1.6 | V |
| V_{F0} | | $T_j = 25^\circ\text{C}$ | 0.9 | 1 | 1.1 | V |
| | | $T_j = 150^\circ\text{C}$ | 0.75 | 0.85 | 0.95 | V |
| r_F | | $T_j = 25^\circ\text{C}$ | 0.5 | 0.7 | 0.8 | m Ω |
| | | $T_j = 150^\circ\text{C}$ | 0.8 | 0.9 | 1.1 | m Ω |
| I_{RRM} | $I_F = 600\text{ A}$ | $T_j = 150^\circ\text{C}$ | | 350 | | A |
| Q_{rr} | $di/dt_{off} = 3800\text{ A}/\mu\text{s}$ $V_{GE} = -8\text{ V}$ | $T_j = 150^\circ\text{C}$ | | 63 | | μC |
| E_{rr} | $V_{CC} = 300\text{ V}$ | $T_j = 150^\circ\text{C}$ | | 13 | | mJ |
| $R_{th(j-c)}$ | per diode | | | | 0.11 | K/W |
| Module | | | | | | |
| L_{CE} | | | | 20 | | nH |
| $R_{CC'+EE'}$ | res., terminal-chip | $T_C = 25^\circ\text{C}$ | | 0.7 | | m Ω |
| | | $T_C = 125^\circ\text{C}$ | | 1 | | m Ω |
| $R_{th(c-s)}$ | per module | | | 0.04 | | K/W |
| M_s | to heat sink (M5) | | 3 | | 5 | Nm |
| M_t | | to terminals (M6) | 2.5 | | 5 | Nm |
| | | | | | | |
| w | | | | | 300 | g |
| Temperatur Sensor | | | | | | |
| R_{100} | $T_C=100^\circ\text{C}$ ($R_{25}=5\text{ k}\Omega$) | | | $493 \pm 5\%$ | | Ω |
| $B_{100/125}$ | $R(T)=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K]; | | | $3550 \pm 2\%$ | | K |

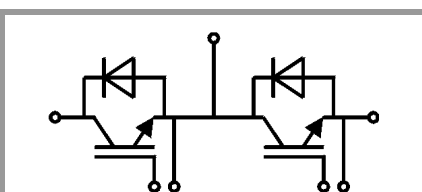

GB

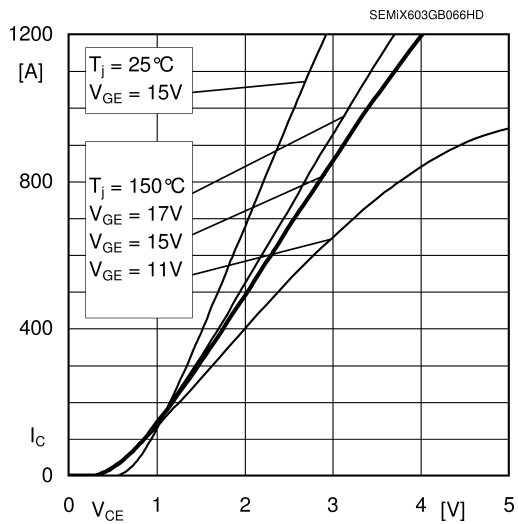


Fig. 1: Typ. output characteristic, inclusive R_{CC+EE}

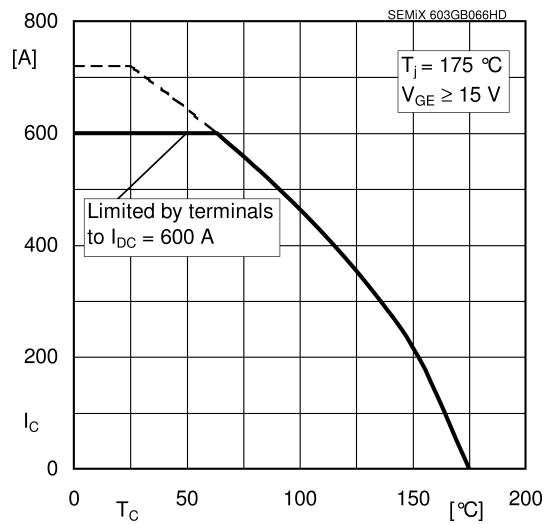


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

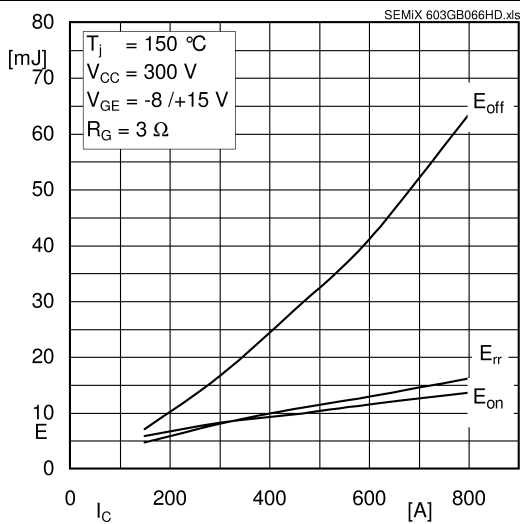


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

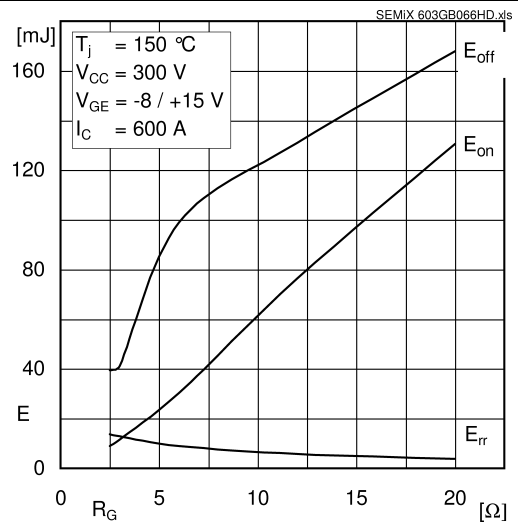


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

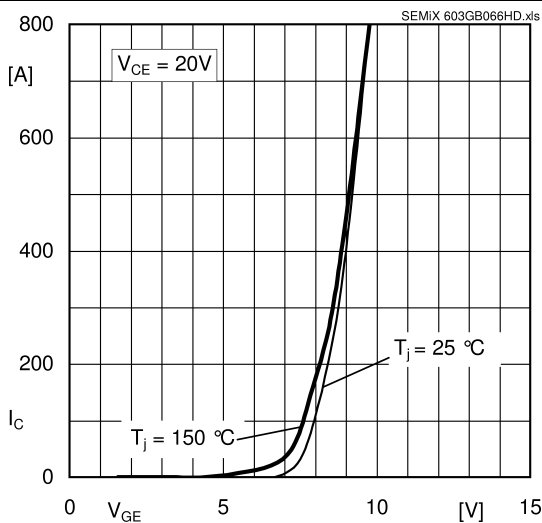


Fig. 5: Typ. transfer characteristic

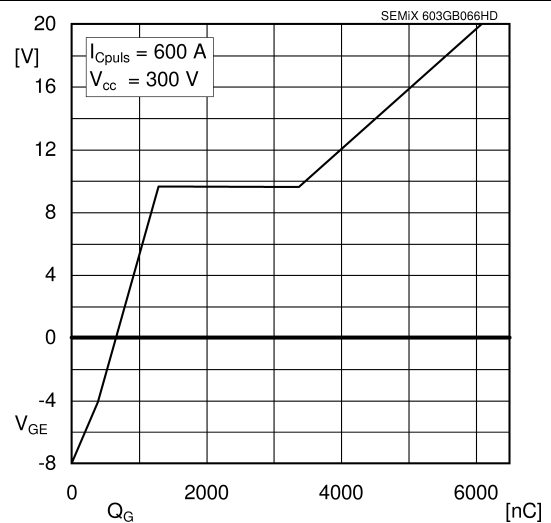


Fig. 6: Typ. gate charge characteristic

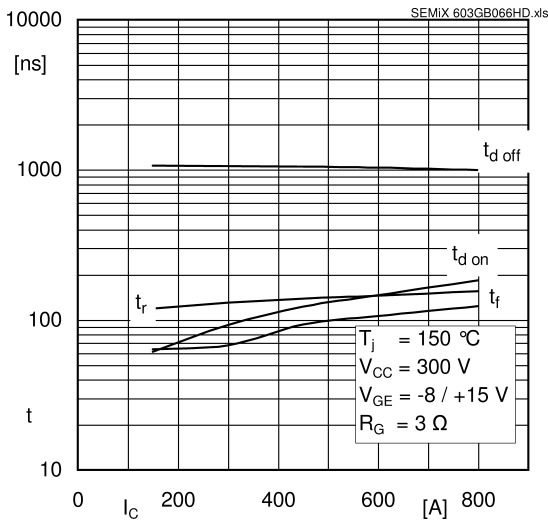


Fig. 7: Typ. switching times vs. I_C

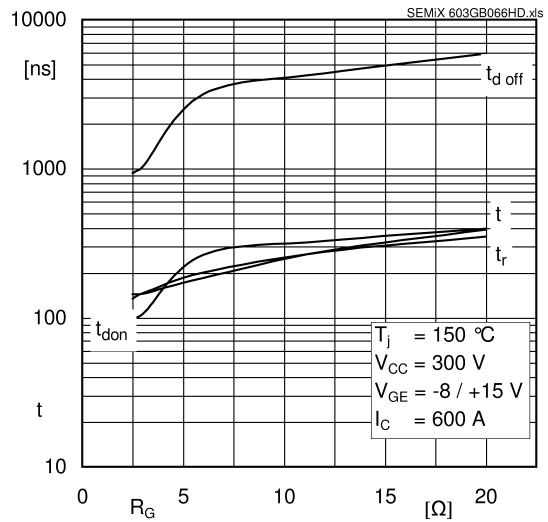


Fig. 8: Typ. switching times vs. gate resistor R_G

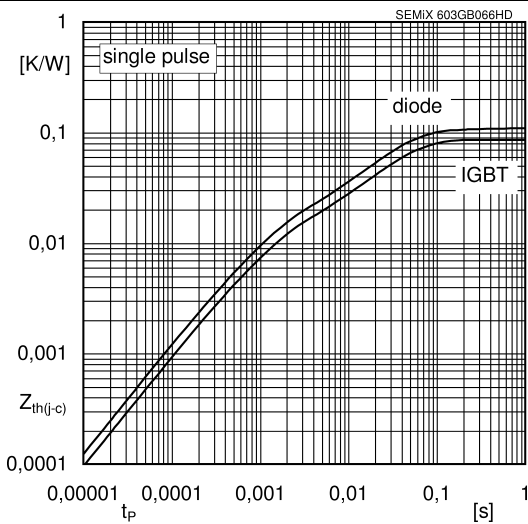


Fig. 9: Typ. transient thermal impedance

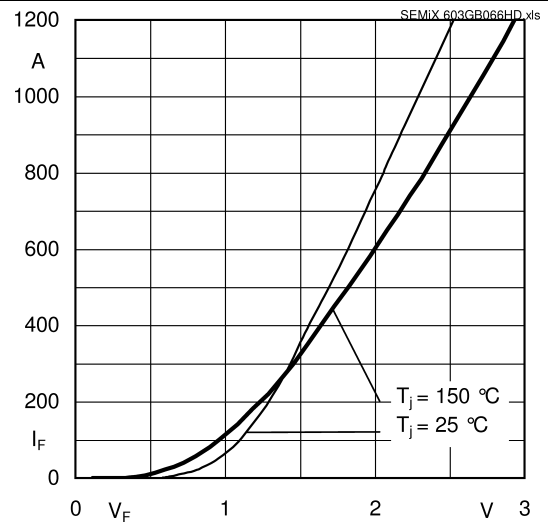


Fig. 10: Typ. CAL diode forward charact., incl. R_{CC+EE}

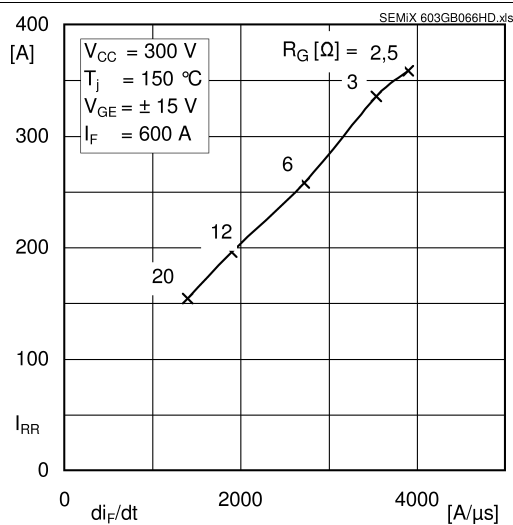


Fig. 11: Typ. CAL diode peak reverse recovery current



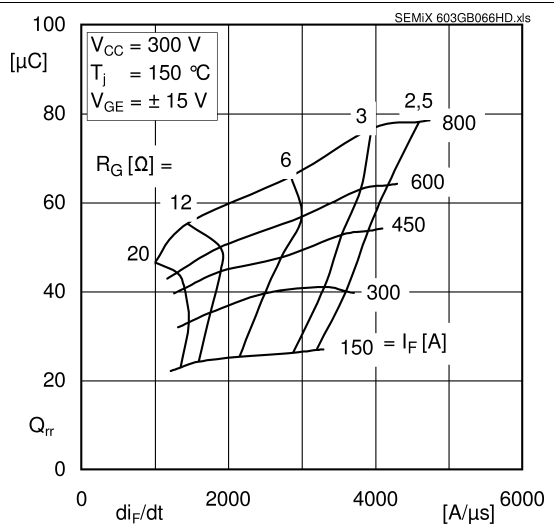


Fig. 12: Typ. CAL diode recovery charge

SEMiX603GB066HDs

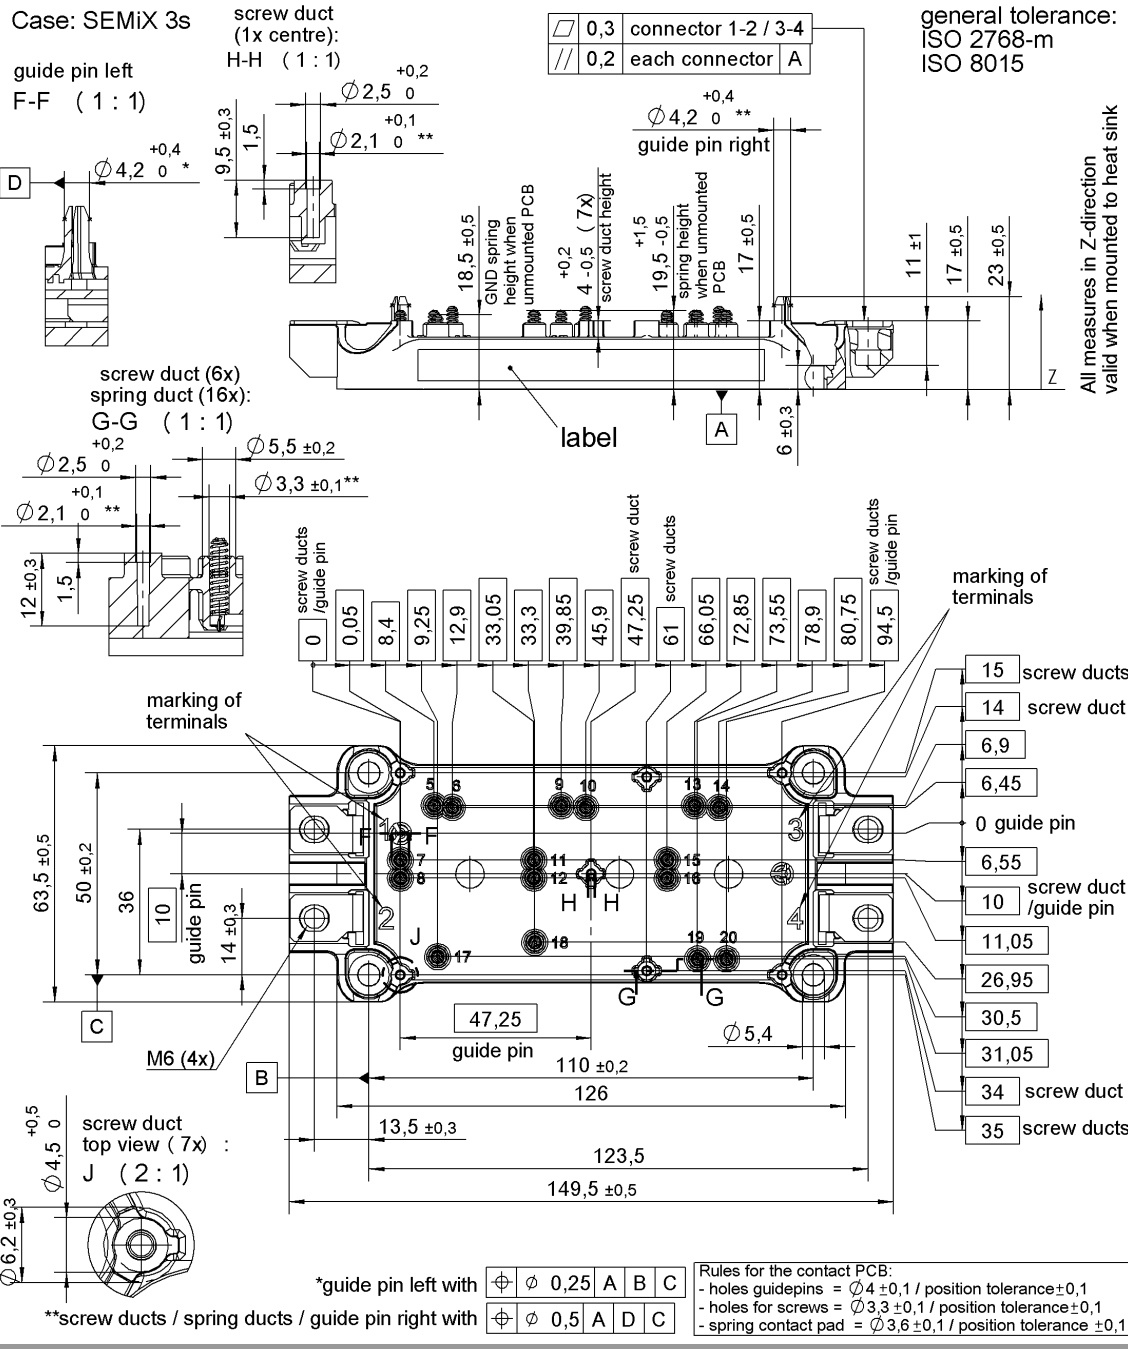

SEMIX 3s

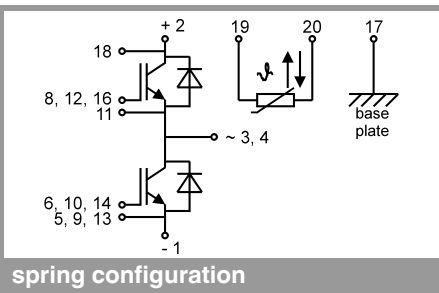

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.